

Rec'd PCT/PTO 12 MAY 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



10/534684



(43) International Publication Date  
27 May 2004 (27.05.2004)

PCT

(10) International Publication Number  
WO 2004/044437 A1

(51) International Patent Classification<sup>7</sup>: F15B 15/14,  
20/00, 21/04

(72) Inventor; and

(75) Inventor/Applicant (for US only): MOE, Magne, Mathias [NO/NO]; Osen 13, N-9414 Harstad (NO).

(21) International Application Number:

PCT/NO2003/000380

(74) Agent: HÅMSØ PATENTBYRÅ ANS; P.O. Box 171,  
N-4302 Sandnes (NO).

(22) International Filing Date:

11 November 2003 (11.11.2003)

(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT (utility model), PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:


20025408 12 November 2002 (12.11.2002) NO

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

(71) Applicant (for all designated States except US): NATIONAL OILWELL NORWAY AS [NO/NO]; P.O. Box 8181, N-4069 Stavanger (NO)

[Continued on next page]

(54) Title: DRAINING OF OIL LEAK IN A HYDRAULIC CYLINDER

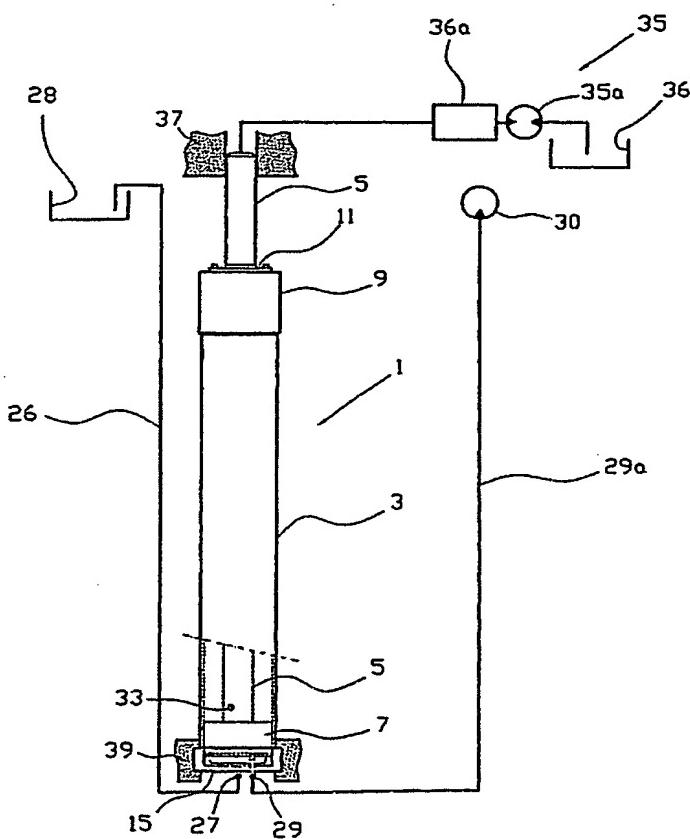

(57) Abstract: A device for a single-acting hydraulic cylinder (1) designed to lift or pull a load upon the existence of an oil pressure on the rod-side of a cylinder piston (7), where the cylinder bottom (15) of the hydraulic cylinder (1) is provided with a drainage outlet (27) for leakage fluid, as well as an air inlet (29).

WO 2004/044437 A1